

Robotics

Robotics, semiconductors and drives

Abstract

Controllable machines have fascinated mankind since ancient times. The evolution from clumsy and heavy machinery until today's intelligent and safe robots has been driven among others by great advances in semiconductor technologies from efficient power semiconductors to advanced sensor systems. The next evolution of robotics will lead us into a far more interesting and immersive era with more autonomous robots and artificial intelligence (AI) merging into highly complex systems that will surround us in our daily lives. Social and technological challenges are ahead. This document exposes ideas on how to overcome those technical challenges through the next generation of semiconductor technologies with a special focus on motor drives.

By
Pablo Yelamos Ruiz, Applications Engineer
Infineon Technologies AG

Table of contents

Abstract	1
Table of contents	2
1 Introduction: robotics around us	3
2 Electronic system architecture	6
2.1 System overview	6
3 Drives in robotics	10
3.1.1 Brushed motor drives	10
3.1.1.1 Discrete versus integrated brushed drives solutions	10
3.1.2 Brushless motor drives	12
3.1.2.1 Possible BLDC solutions	13
3.1.3 Robotics drives technologies	16
3.1.3.1 MOSFET and package technologies	16
3.1.3.2 High switching frequency drives-solutions with GaN	18
3.1.4 Safety in robots	19
4 Conclusions and outlook	20

1 Introduction: robotics around us

Robots can be defined as autonomous systems capable of carrying out certain tasks without human intervention and in many cases in a repetitive way. Of course, once robots are provided with higher artificial intelligence they can start making autonomous decisions according to human pre-programmed behaviors. Even today many different types of robots are already around us aiming to simplify the way we work and live. There are several fields of applications in robotics. This document addresses some of the main areas or robotics applications:

Service robots

These robots can be considered as our helping hands in our everyday tasks. Service robots can be found in our immediate surroundings such as our homes and gardens (e.g., robotic vacuum cleaners or lawn mowers). They take over routine tasks to increase our effectiveness. Despite the ease-of-use of the end products, these devices have a highly complex hardware to enable smooth and user-friendly operation. Several motors are required to move the machine and enable it to do the tasks accurately. Advanced functionalities like collision avoidance or room mapping require built-in radars and sensors. Most advanced models will offer as well intelligent routing with learning algorithms. Users can benefit in several ways from these features; for example reduced time to finalize a task.



Figure 1 Service/home robot and automated guided vehicle examples

Automated guided vehicles (AGV) / warehouse robots

A warehouse robot could be considered as an advanced version of the home robot developed for industrial environments. More powerful than service robots, these are supplied with higher voltage batteries and typically use BLDC drives with high precision positioning.

Warehouse robots are designed to improve efficiency and productivity in retailer warehouses. This can be achieved for instance by automatically transporting items and automatically organizing the stocks. When warehouse size increases, a good number of warehouse robots which automatically deliver products to the warehouse workers can make a huge difference in the productivity of the operations. Note that different challenges are faced here in an environment with hundreds of robots. Overcoming

these challenges require a high level of synchronization of the machines which in turn creates different design goals for the engineers who develop hardware and software for these robots.

Collaborative robots - cobots

The concept 'cobot' has been created to define this new type of robots trying to describe that in contrast to classic industrial robots that work standalone or together with other machines, cobots are designed to collaborate with human beings, but not substituting them. A good example of a collaborative robot is the small robotic arm. These are thought to work together with humans to achieve together a certain task with a higher level of efficiency and productivity.

These robots include functions to safely help workers on small actions such as screwing or moving small items. Small robotic arms with reduced cost are predicted to spread into smaller businesses as well as in the more robotized classic industry-like automotive assembly industry.

It is important to point out that a reduced cost is not the unique factor to consider for a successful expansion of cobots' market. A key factor to be considered is the ease of deployment and programming. Easy installation and short time to get the cobot in action are needed to be considered by their designers. In this sense a good amount of software solutions will help users to program quickly the main functions of the system.



Figure 2 Cobots and service/educational robot examples

Educational robots

Educational robots can develop their activity in many different locations. Tasks like welcoming guests at a hotel reception, providing indications in tax office, guiding in museums or teaching at schools could become very popular soon. The time for this type of robots with a certain humanoid resemblance to invade our homes, will depend on the technical superiority of such a system over existing solutions, but probably more on the social acceptance of having an autonomous intelligent entity in our own homes.

Many more types can be categorized; however, the aforementioned four categories could represent a good starting point for analyzing some of the technical requirements and explain how semiconductors like Infineon can accelerate expansion of robots in the broader consumption.

2 Electronic system architecture

2.1 System overview

Figure 3 describes a common architecture for robots described in the previous section. Some robots will not include all components discussed here; however, this still represents a good system overview. The 'main CPU' is the central brain and carries most of the intelligence of the system. This processor is responsible for the system coordination. This can vary on a broad spectrum depending on the specific robot's goal, but there is a common expectation behind: making sure that the robot works properly and does all tasks independently. Therefore, the processor or processors will command the different modules to execute tasks in a scheduled way. The rest of modules execute instructions and report status to the main CPU.

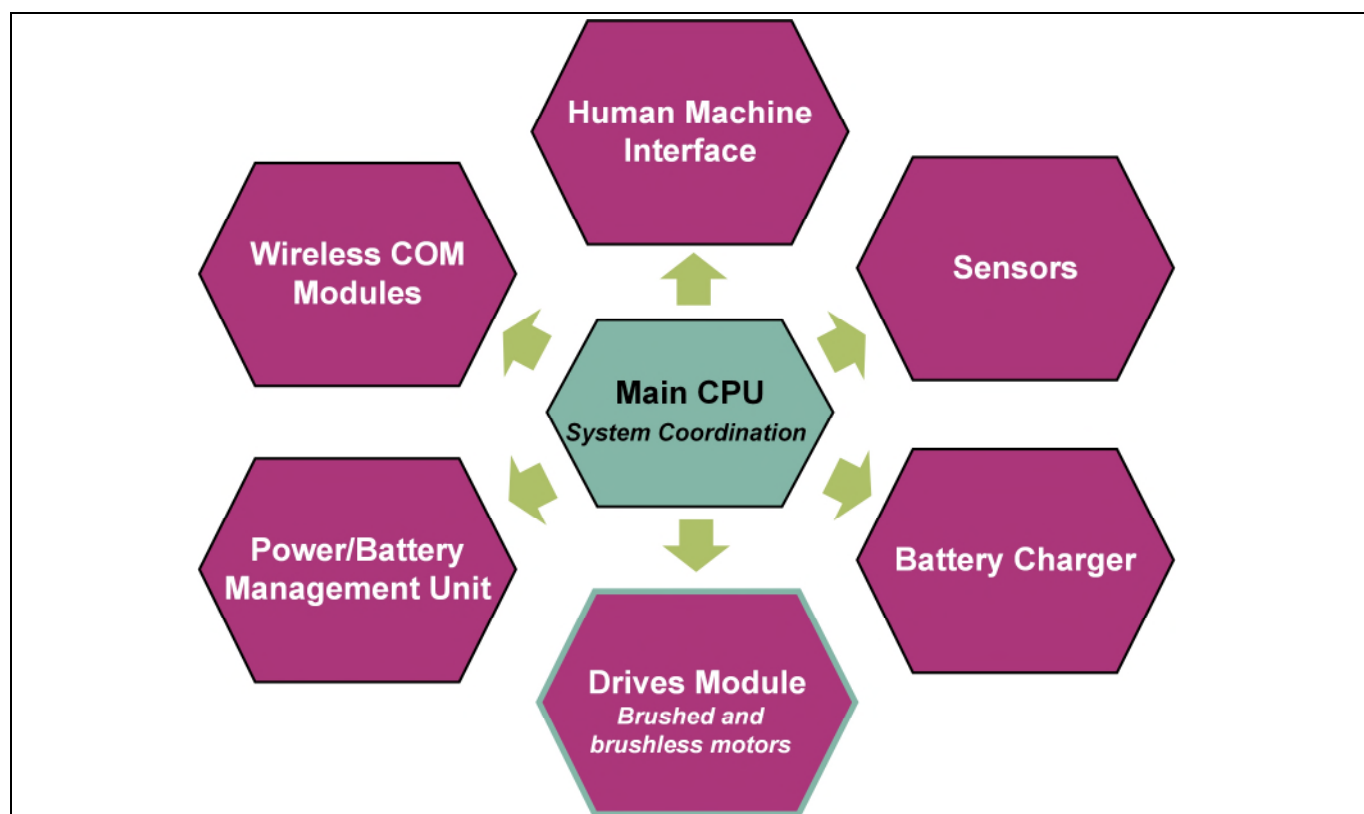


Figure 3 Common robot architecture system block diagram

Figure 4 depicts a deeper delve into a robotic system structure with many possible modules that can be fused into a robot to make it safe, secure, reliable and able to interact with its environment.

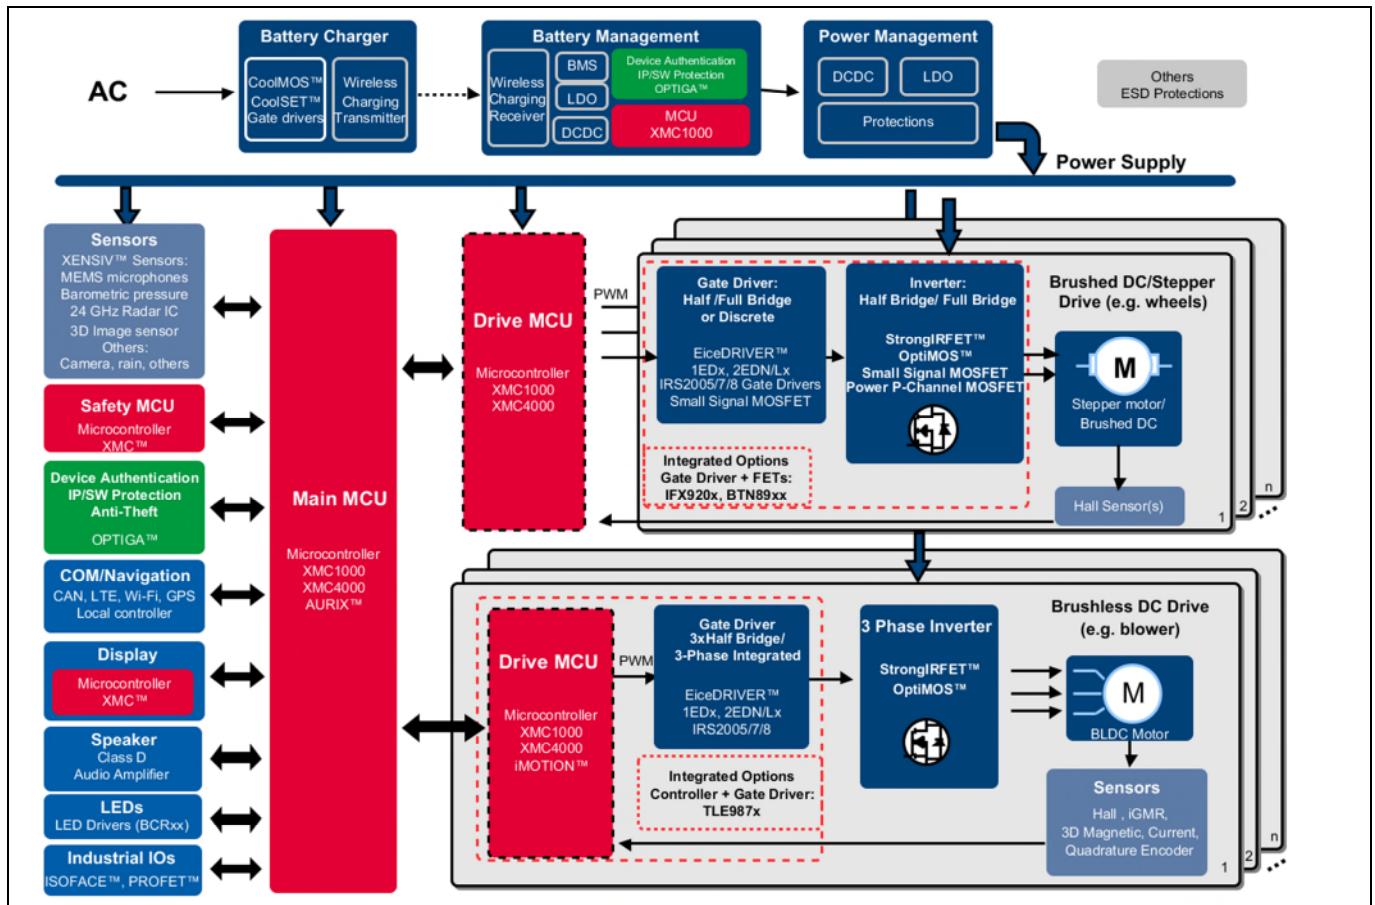


Figure 4 Detailed block diagram of service robots

Most common main components in service robots are the following:

Power/battery management unit

Most of the systems discussed here are battery driven, whether it is a robotic lawn mower or an educational robot. Despite the presence of lead acid batteries due to lower cost, lithium batteries are becoming dominant in the industry due to their higher energy density and lower performance degradation with time. A battery management unit takes care of the overall condition of the battery (including health and safety aspects), and also protects it against system overvoltage or overcurrent.

When designing the battery module, security is definitely a factor to consider. Device authentication and IP or software protection can be achieved with Infineon's innovative OPTIGA™ security chips. Batteries also rely on general purpose microcontrollers such as XMC1000 family based on ARM® -Cortex™-M0 processor and low voltage MOSFETs (OptiMOS™ and StrongIRFET™) to implement auxiliary functions like metrology or monitoring in the battery system.

Apart from a battery management unit, a power management unit supplies power to the different components in the robot by controlling in a stable manner the required voltage rails - 12V, 5V or 3,3V- for the rest of modules. Infineon offers a great portfolio of semiconductor solutions from buck converter controllers such as IFX90121, IFX91041 to linear regulators - fixed and adjustable – such as IFX1763, IFX54441, IFX54211 or IFX30081.

Wireless communication (COM) modules

Robots are interconnected to other systems like other robots in the environment or control units that command complete robot fleets in real time. Warehouse robots for example require communications like Wi-Fi to exchange information about location and route with other warehouse robots at any time to prevent collisions. In many cases, a local controller will handle the communication, working as a gateway between the main controller in the robot and the external world.

Human machine interface (HMI)

Most of robots considered here offer a certain level of interaction to humans. Sometimes it is only a simple display like in lawn mowers, but more advanced possibilities in educational robots like high resolution displays similar to a tablet are common. Also in this category LED lights are usually used to provide information or feedback to the user. Infineon offers integrated linear LED driver ICs like BCR430U that can help to design in a few steps.

Once the robot is provided intelligence enough to be able to interact verbally with the user, both voice input and output devices are required for the machine. Let's take educational robots as an example. Both speakers and sometimes an array of microphones are utilized here to enable the robot to fulfill its task of education which is an interactive process. Infineon offers Class D amplifier solutions like IR43xx - PowIRaudio™ family featuring high performance audio capability and highly integrated MEMS microphones from the XENSIV™ family of sensors that offer highly integrated high performance voice interface with high SNR value and low distortion.

Sensors

Many types of sensors can be found in robots. The most common ones could be position sensors (Hall sensors, encoders), speed, angle or current sensors in drives. However, as the robot needs a precise understanding of its environment different types of sensors are required such as radar sensors for motion sensing (distance and direction), barometric pressure sensors or 3D image sensors for object recognition. This wealth of advanced features boosts the robot's autonomous capabilities, especially when it is deployed in a complex environment such as crowded warehouses.

Battery charger

In some cases, battery driven robots include an on-board charger. This means they can be directly connected to the AC grid. In these cases, a charger is included in the robot to generate a high voltage DC level that the power management unit will process further down. A wide range of products are offered by Infineon in the battery charger segment from high voltage MOSFETs (CoolMOS™) to integrated controllers (CoolSET™) and high voltage gate drivers (EiceDRIVER™ family).

An emerging trend is the inclusion of wireless charging capability. This is of especial importance in systems that are required to work continuously. In such systems the time of charge is time that the robot is not performing any work. Using wireless charging will enable the robot to charge while still performing. Infineon has solutions as well for wireless charging in both auxiliary controllers such as XMC1000 family based on an ARM® Cortex™-M0, power switches such as OptiMOS™3 BSC12DN20NS3 and half-bridge gate drivers for class D amplifiers or low side drivers such as 1EDN8511B for class E version.

www.infineon.com/service-robotics

Drives module

Robots move and their movement is enabled by drives and motors. When looking at the different categories of robots presented above, it is easy to imagine how many different types of moves are possible. For example a small lawn mower or service robot needs to move only slowly and with relatively low accuracy. A small motor rated to a few watts is enough for that situation, so the focus is on cost optimization of the drive system and in most of the cases, the designer will select a brushed motor for this purpose.

A second example can be cobot's arm drives. Cobots need in many cases 5 to 7 independent axes. Those arm parts need to move precisely between different positions and sense any counterforce created by an obstacle, so accurate positioning and torque sensing are required. Usually the designer will decide for a brushless DC (BDLC) motor for such drives, together with a set of position sensors (e.g., Hall sensors, encoders) and speed or torque sensors.

In some cases both brushed and brushless motors can co-exist in a robot. Consumer applications, like a robotic vacuum cleaner, might benefit from the low cost of a brushed motor used in the wheels, while requires a BLDC motor for the high speed air blower function.

3 Drives in robotics

In this section some concepts and proposals will be discussed based on semiconductors' offered benefits including energy efficiency, thermal behavior and space saving. We will also touch on how these technologies can help robotics to better perform in both brushed DC and brushless DC implementations.

3.1.1 Brushed motor drives

Brushed motors despite their well-known disadvantages are still widely used in the design of service robotics. Many of the drives in robotics do not demand high efficiency, precision or speed, therefore usage of a brushed motor is a reasonable option for this application. Additionally, the reduced cost of brushed motors in comparison to brushless motors and the reduced number of components and control requirements make them even a more attractive choice.

Brushed motors are commonly controlled from a central microcontroller (MCU) that takes care of one or more of these motors at the same time. Control is quite simple and uses ON-OFF signals (e.g., GPIOs) or simple PWM patterns if variable speed is needed to command the movement of the motor. If necessary, one or more Hall sensors can be used to get the angular position of the motor.

Typical drives using brushed motors are low power motors in wheels of light robots (e.g., vacuum cleaners). Another example is head rotation or small, light parts movement motors (e.g., in educational robots). None of these applications demand accurate positioning or high speed rotation. Through these small/slow movements the robot can provide feedback/interaction to humans.

3.1.1.1 Discrete versus integrated brushed drives solutions

Figure 5 shows a typical drive circuit used in brushed drives. Both uni-directional and bi-directional (for example commonly used in wheel drives) motor operations are important. A full bridge (e.g., H-bridge) allows the current in the motor to be reversed depending on the control signal pattern, therefore allowing the motor rotation in both directions.

Discrete components in 'push-pull' configuration are commonly used to drive the power switches. With regard to the power switches, 'N+N' MOSFETs, 'P+N' MOSFETs for simplified gate driver design or even BJTs for a more cost sensitive design can be used.

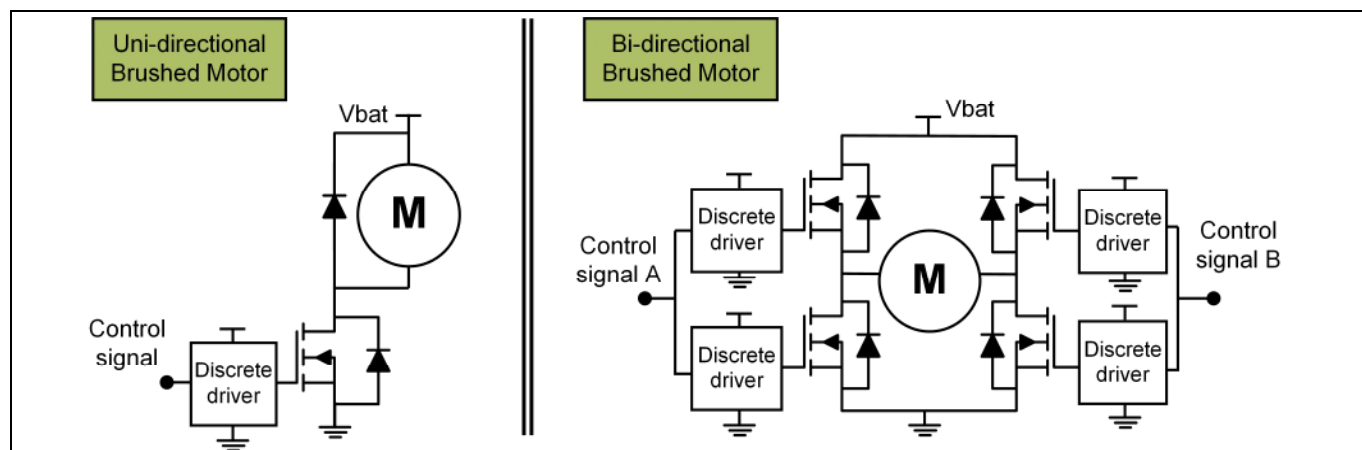


Figure 5 Brushed DC common drive circuits for uni-directional motors and bi-directional motors

The amount of components required for such discrete implementation in most cases sums up to 30 or more components. This, in addition to the design complexity, increases the PCB footprint required for the drive circuit. As the number of brushed DC units grows, so does the excessive space required and with it, the cost of the system. Several integration level possibilities are offered to help in such situations:

- **Low voltage MOSFET integrations** (marked with red pecked line in Figure 6): instead of using discrete components for high side and low side power switches, integrated MOSFET in both 'N+N' and 'P+N' can be used:
 - o N+N: e.g., IRF40H233 dual symmetrical 40V, 5.9mΩ
 - o P+N: e.g., IRF9389: 30V, 27mΩ-64mΩ – easy gate driver circuitry thanks to PMOS on high side.
- **Gate drivers** (marked with green pecked line in Figure 6): an alternative to discrete gate drivers are integrated half-bridge gate drivers that offer a heavily reduced amount of components compared to the discrete solution. Infineon's product offering includes:
 - o Half-bridge drivers: e.g., 2EDL05N06PF from the EiceDRIVER™ family, or IRS2007S
- **Power MOSFETs and gate driver integration** (marked with purple pecked line in Figure 6): this is the highest level of integration in which the gate driver and the MOSFETs are integrated in a single component either for a single motor (4 x MOSFETs) or for two motors (8x MOSFETs):
 - o Single brushed motor low power (up to 6A, V_{IN} 36V): IFX9201SG
 - o Two brushed motors low power (up to 6A each, V_{IN} 36V): IFX9202ED
 - o Single brushed motor high power (up to 55A, V_{IN} 40V): NovalithIC™ family, e.g., BTN8982TA. These are automotive qualified parts.

MCU Integration

As presented in previous sections, brushed motors are simple to control: in most cases driven in open loop, an 'ON-OFF' or simple PWM signal is enough to drive the motor, and even a position sensor is not

always a must in the applications mentioned above. As a result, designers have decided to utilize more centralized architectures of control to reduce the number of controllers in the system. Either the main CPU of the system - as shown in Figure 3 and Figure 4- or a local controller takes care of one or more brushed DC motors in the robot. Thus, integration of an MCU with drive components, like gate driver or power switches, does not provide any immediate advantage as it will unnecessarily multiply the number of controllers in the system.

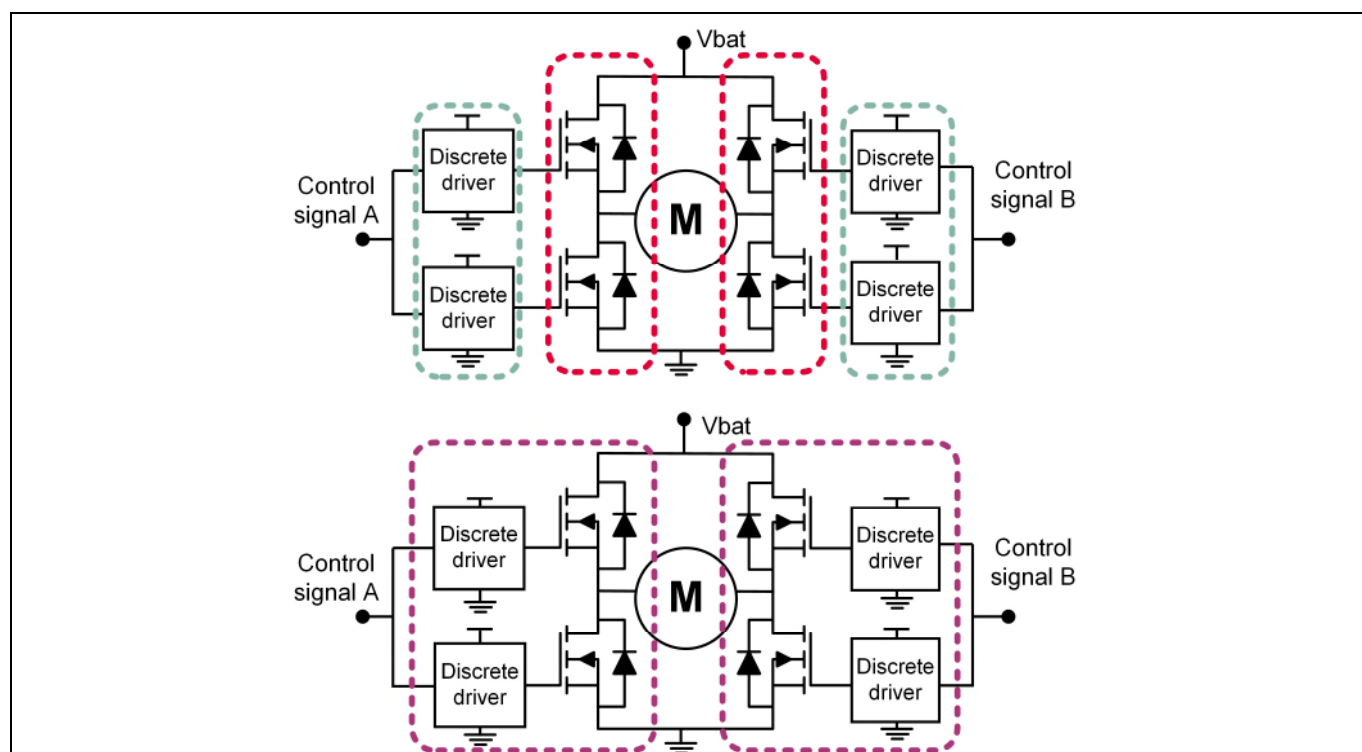


Figure 6 Brushed drives possible integrated solutions

3.1.2 Brushless motor drives

Many are the advantages of brushless DC (BLDC) motors from which robotic drives can benefit from. Higher efficiency becomes an important factor simply because most of the robots are battery powered. BLDC motors have better power density resulting in two parallel benefits: on one hand, footprint is reduced on a specific power level when compared to a brushed motor; therefore, the motor can be integrated into smaller compartments in the robot. On the other hand, this will make the motor lighter and as a result, the overall weight of the robot can be reduced automatically increasing the battery autonomy. Those two aspects are crucial in small robot arms or humanoid robots.

Factors like acoustic noise can be a decisive factor as well. Brushed motors make more noise than brushless ones. This can be a problem in certain environment where the robot might need to move quietly (e.g., in hospitals).

When the application requires high speed motor, like in blowers, the wear out of contact brushes in brushed motors become a critical issue that does not exist in BLDC motors. So these (BLDC motors) are the common motor choice under such requirements.

Nevertheless, we also have to highlight that the control mechanism required for BLDC motors is more complex and the number of components is also greater compared to brushed motors.

3.1.2.1 Possible BLDC solutions

Brushless motors are well spread in the industry and different implementations can be found. Most common control methods are block commutation in both Hall-sensored and sensorless (BEMF feedback) variants and Field Oriented Control (FOC), usually in a single shunt configuration.

Two main system architectures are popular, independent of the control method: centralized and de-centralized systems.

Centralized control

The main processor or microcontroller takes care of control of one or more BLDC motors. On one hand, the main processor gets highly loaded by the real time control of one or more motors. On the other hand, it has less time-lag and tighter control between the different drives. Design and layout of the robot components might be complicated in systems where the motors are located far away from the central unit, in particular cabling can become an issue in high density systems with centralized control.

De-centralized control:

Each BLDC unit is controlled by a dedicated controller that sits next to it. Even though this is a less common architecture, it definitely has advantages and even in some systems, safety related requirements might impose the usage of different controllers for different drives.

In a similar manner as in brushed DC motors, integration of parts offers possibilities to reduce the footprint and number of components of the system. The most important component integration cases for BLDC drives -shown in Figure 7 – are:

A - Complete discrete system

Non-integrated version with microcontroller, gate driver, and power switches in discrete configuration. Gate drivers can be found in single or half-bridge configurations.

B - Dual MOSFETs and three phase integrated gate driver

This is the first level of integration. Dual MOSFETs integrate two MOSFETs in one package, a high-side and a low-side. As the power density increases, the packaging design needs to improve too. In terms of gate drivers, the most obvious step is integrating into a three-phase gate driver. Additionally, bootstrap diodes can be integrated for reduced component count. Features like increased robustness to voltage transients and protections are also a key when talking about higher power drives. 6EDL04N02PR for example offers all this features.

C - Dual MOSFETs and microcontroller + three-phase gate driver integrated

Integrating the microcontroller and the drivers together is the next level of integration. Additional features like operational amplifiers or linear regulators can be integrated to minimize the number of

external components. This setup would not be applied in systems that have centralized control of several drives.

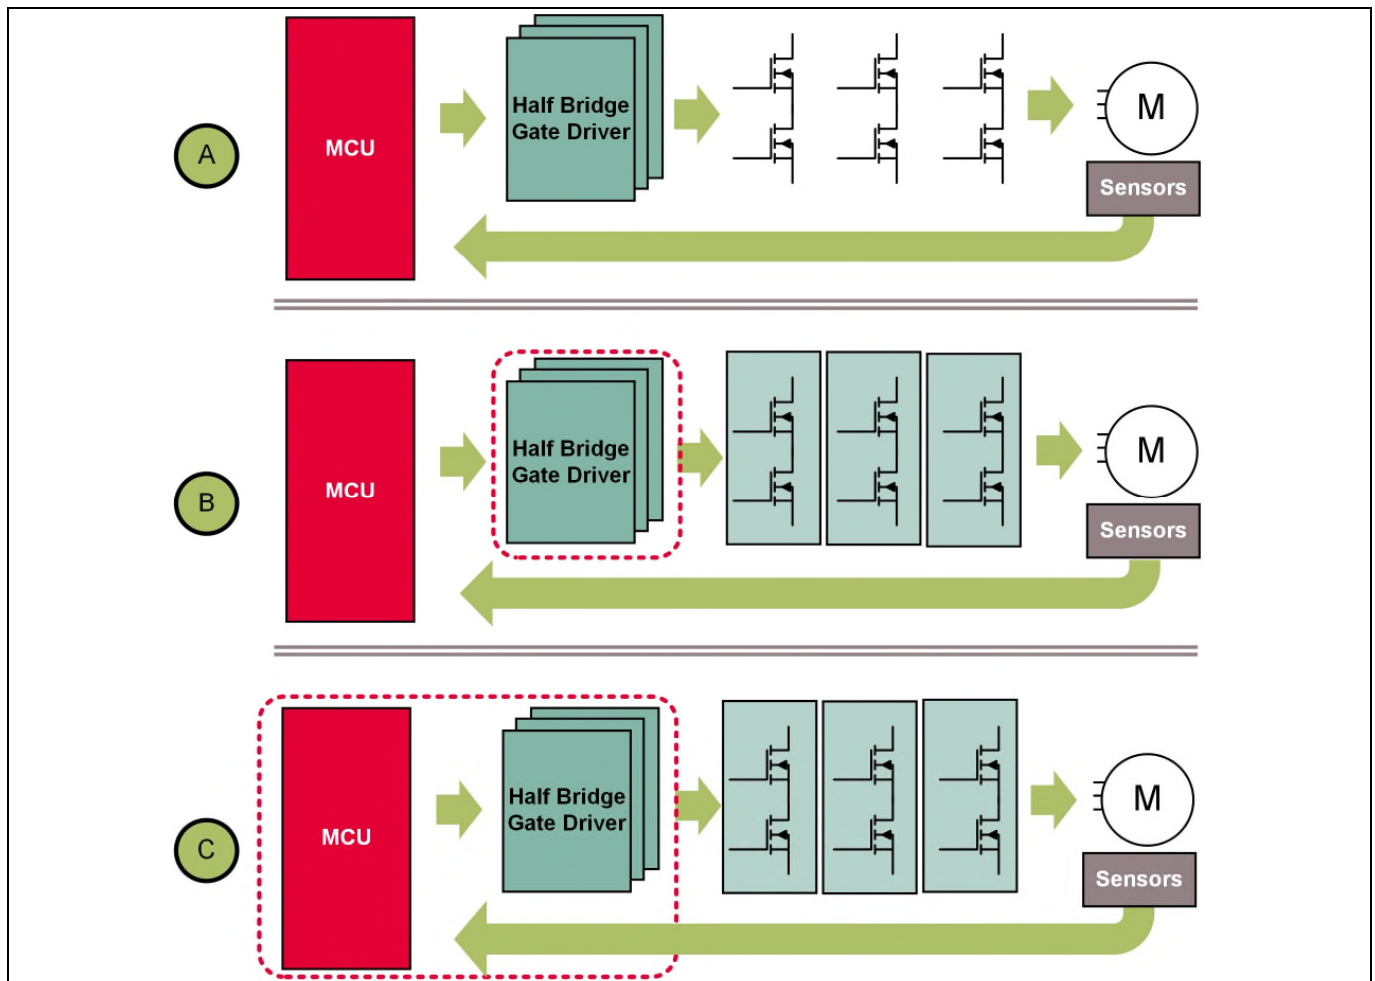


Figure 7 BLDC drives integration options

Even though less popular, another possibility for low-power designs is the power block integration. This means the integration of a dual MOSFET (high-side and low-side switches) and the gate driver together in one single package.

Table 1 compiles a list of recommended Infineon products relevant for BLDC drives including MOSFETs, gate drivers, controllers and sensors supporting all 3 different levels of integrations presented previously.

Table 1 List of some recommended Infineon components for BLDC drives

Product Family	Voltage Class	Package	Part Number	R _{DS(ON)} (mΩ)	Comment
OptiMOS™ 20 V - 200 V	40	SuperSO8	BSC010N04LSI	1.05	With integrated Schottky diode
		SuperSO8	BSC022N04LS	2.2	
		S3O8	BSZ025N04LS	2.5	3x3mm package
	60	SuperSO8	BSC014N06NS	1.45	Best in class
		SuperSO8	BSC027N06LS5	2.7	
	80	SuperSO8	BSC026N08NS5	2.6	Best in class
		SuperSO8	BSZ123N08NS3 G	12.3	Cost/performance optimized
		TO-Leadless	IPT012N08N5	1.2	
		D2PAK 7pin	IPB015N08N5	1.5	
	100	TO-Leadless	IPT015N10N5	1.5	
		D2PAK	IPB020N10N5	2	High performance
	200	TO-Leadless	IPT111N20NFD	11.1	Small profile
StrongIRFET™ 20 V - 60 V	40	D-PAK	IRFR7446PbF	3.9	Cost optimized
		DirectFET™ ME	IRF7480M	1.2	
		PQFN 5 x 6 B	IRFH7084	1.25	
		PQFN 5 x 6 B	IRFH7004	1.4	
	60	PQFN 5x6	IRFH7085	3.2	Cost optimized
Gate drivers	20V	SOT-23	1EDN7550	-	True differential inputs
	100V	VDSON-8	2EDL8114	-	Half-bridge driver
	200V	8 lead SOIC	IRS2011S	-	Half-bridge driver
	600V	DSO-8	2EDL05N06PF	-	Half-bridge driver
	600V	DSO-28	6ED003L06-F2	-	Three phase gate driver
Controller	1.8V to 5.5V	VQFN-64	XMC1404-Q064X0200	-	Includes MATH-co-processor
	3.3V	LQFP-64	XMC4100-F64K128	-	With high resolution PWM (HRPWM)
	3.3 V	QFN-32	IRMCK099M	-	Motor control IC (incl. motion control algorithm)
	1.8V to 5.5V	LQFP-64	IMC101T-F064	-	Motor control IC (incl. motion control algorithm)
Hall switches	Up to 32V	SOT23	TLI4961-1M	-	Extended robustness
	3.0V-5.5V	SOT23	TLI4963-1M	-	
Angle sensor	3.0V-5.5	DSO-8	TLI5012B E1000	-	GMR sensor
Current sensor	3.1V-3.5V	TISON-8-1	TLI4970-D025T4	-	Up to 25A, 1.6% accuracy

3.1.3 Robotics drives technologies

3.1.3.1 MOSFET and package technologies

Regarding low voltage MOSFETs, significant developments have been made in recent years. Infineon has been innovating continuously to improve figures of merit of MOSFETs with special focus on reduced $R_{DS(ON)}$ (drain to source ON resistance) and gate charge (capacitance) of the MOSFET, minimizing both conduction and switching losses from one generation to the next.

In drives applications, both conduction and switching losses are in the focal point. Depending on the control method, different losses are observed. For example, it is very common to use synchronous rectification. This technique turns on low-side MOSFETs when the current freewheels through their body diodes. This dramatically reduces the conduction losses of the body diode ($P_{Loss} = I_F \times V_F$) as the $R_{DS(ON)}$ value of the MOSFETs get lower and lower with new generations.

Even when synchronous rectification is used, the low-side diode is demonstrated to be one of the main sources of losses in this type of drive applications. In order to address this issue, Infineon has developed MOSFETs with integrated Schottky diode that reduces the forward voltage, therefore minimizing the power loss in the diode. These products are referred to as OptiMOS™ FD (Fast Diode) and can be identified by the suffix –LSI, e.g., BSC010N04LSI.

Figure 8 shows a power loss breakdown measured in a three-phase inverter using block commutation PWM (6 steps) with synchronous rectification. The supply voltage is 18V and the selected MOSFET for the comparison is BSC010N04 in both LS and LSI versions.

One can easily see that both conduction ('Cond-') and switching ('SW-') losses have an important role in both high-side ('HS') and low-side ('LS') MOSFETs. Three main conclusions can be extracted from this data:

1. Switching losses are negligible in the low-side MOSFET as soft-switching is granted
2. Conduction loss in low-side diode is by far the most dominant source of losses
3. LSI (Fast Diode) version of MOSFET with integrated Schottky diode reduces the conduction loss by approximately 25%. This reduction depends on system conditions like current level.

However, switching losses increase with switching frequency. Common frequencies in robotic inverters range from 10 kHz to 40 kHz. Infineon's best-in-class OptiMOS™ solutions offer low $R_{DS(ON)}$ and low-charge MOSFETs to remarkably reduce both types of losses.

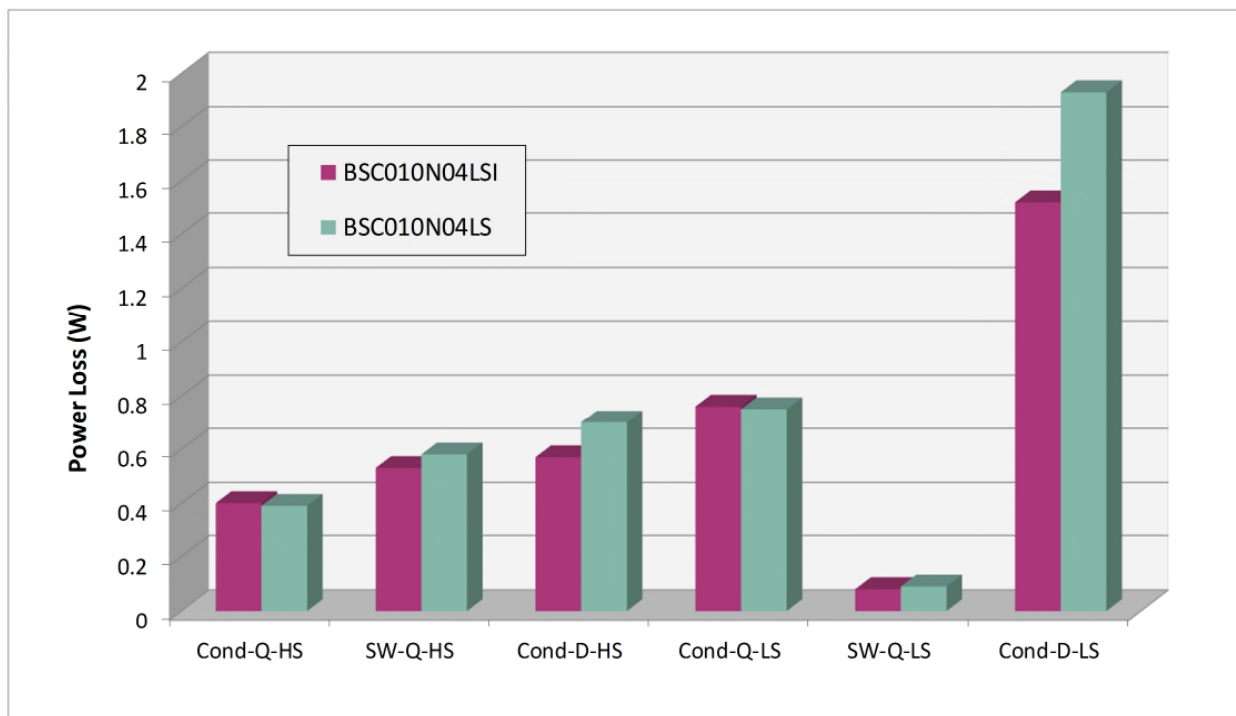


Figure 8 Power loss breakdown showing conduction ('Cond-') and switching ('SW-') losses in high-side (HS) and low-side (LS) MOSFETs as well as body diode (D) losses. Conduction of low-side body diode is dominant and can be reduced by usage of LSI parts

All these technologies reduce the power losses in the inverter effectively. Nevertheless, losses are inevitable and heat will be produced in the power switches. Thermal management is one of the key challenges in drives design, especially when considering high power density designs like those in small robotic arms. Infineon DirectFET™ packages, as shown in Figure 9, are dual side cooling packages with direct connection between the metallic package and the silicon die inside, minimizing thermal resistances to the exterior. Also the die gets directly connected to the PCB on the bottom side.

DirectFET™ packages spread efficiently the heat from the junction to the bottom of the PCB, and from the top through the metal package into the air or an optionally used heat sink for more rigorous cases. In addition to its extra low profile this package becomes the perfect choice for space constrained designs. Figure 9 shows a comparison of the thermal resistances between DirectFET™ and D²Pak packages. DirectFET™ has less than half of the thermal resistance (8.1°C/W) than D²Pak (16.8°C/W).

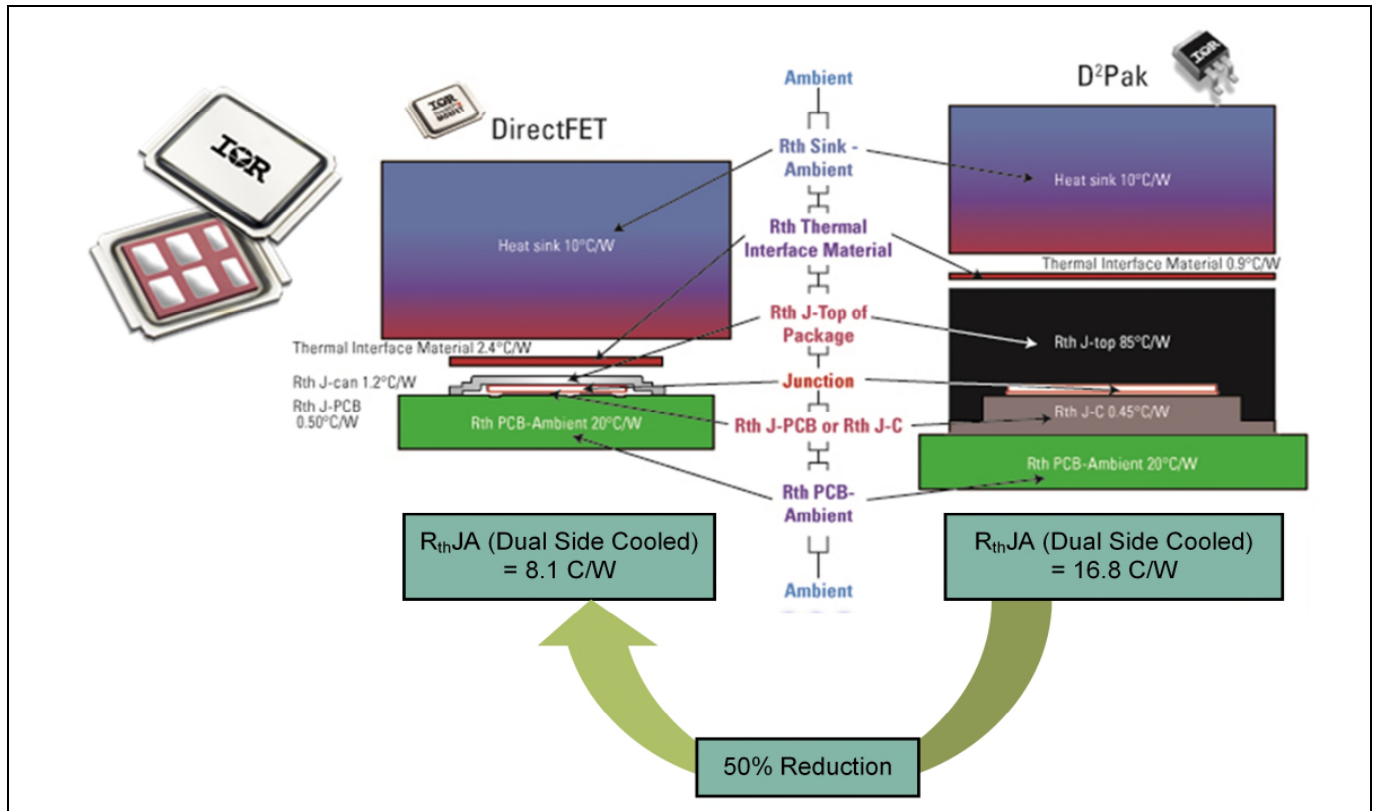


Figure 9 DirectFET™ packages allow optimized thermal design in high density drives. Comparison of thermal resistances between DirectFET™ and D²PAK packages

3.1.3.2 High switching frequency drives-solutions with GaN

Increasing the switching frequency can help improving the performance of a drive by reducing the torque ripple. This technique is used in other applications, like power supplies, to reduce effectively the size of magnetic components. Wide band-gap semiconductors, like Gallium-Nitride (GaN), can provide best performance at higher switching frequencies. Reverse recovery of the diode is highly improved in GaN MOSFETs, making it a great choice for these cases.

With increased switching frequency, controllers are required to be adapted:

- PWM resolution must be considered to ensure that the complete loop can stay under required accuracy. Infineon offers microcontrollers like XMC4100 family with high resolution PWM modules for such high resolution loop purposes, especially when switching frequency increases.
- Also the processing capability of the microcontroller must be considered when switching frequency increases. Assuming a cycle-by-cycle control, less time is then available to finalize new duty cycle calculations. Infineon has a broad portfolio of controllers with wide range of performance from XMC1000 family ARM®-Cortex™-M0 at 32MHz to XMC4000 family ARM®-Cortex™-M4F at 144MHz and AURIX™ when higher level of functional safety and performance are required. Increasing the control loop execution frequency results in better dynamics of the motor resulting in more accurate control.

Infineon' product offering also covers a special MATH co-processor (including both a CORDIC unit for trigonometric calculations and a division unit) dedicated to motor control calculations. This co-processor improves the execution time of control loops in XMC1000 family compared to standard implementation (hardware calculation versus software calculation). A comparison of the execution time of cosine and division functions, often utilized in motor control algorithms like Field Oriented Control (FOC), is shown in Figure 10.

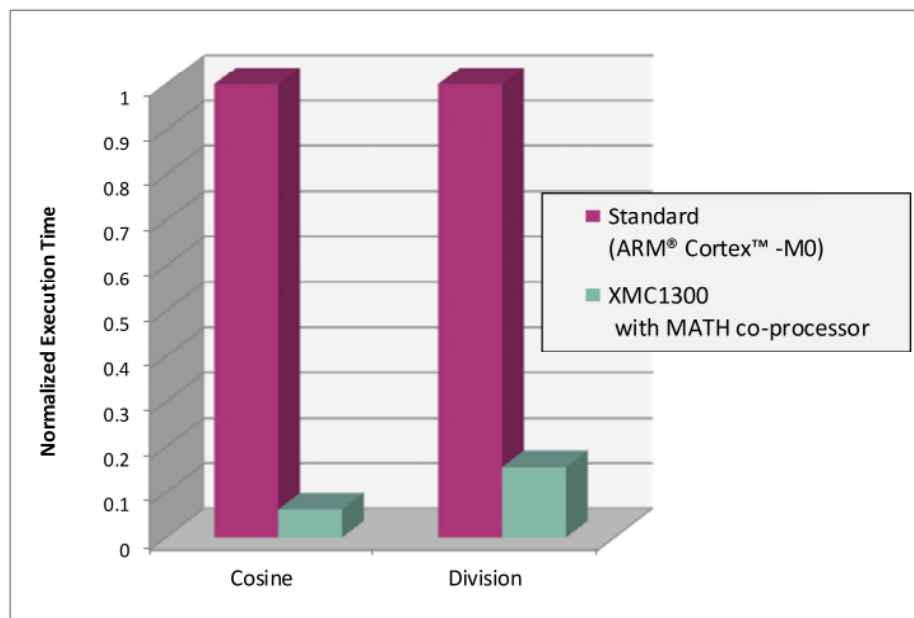


Figure 10 Normalized execution time for cosine and division functions with a standard ARM® Cortex™-M0 without MATH co-processor (Standard) and with XMC1300 utilizing the integrated MATH co-processor and DIVIDE unit

3.1.4 Safety in robots

Robots and in particular collaborative robots are regulated by standards like ISO10218 and ISO/TS 15066, guaranteeing that the machine operates safely in any condition. This might affect some areas of the design including both software and hardware.

In many cases, a safety controller is designed as previously shown in Figure 4. The microcontroller monitors different aspects of the robot operation and works redundantly to the main controller that executes the task. As an example, it can check Hall sensor signals to detect a possible stalled motor condition. In case the motor stops unexpectedly, this safety controller can provide an additional second level of error detection to the main drive controller.

For more advanced safety features Infineon offers solutions like AURIX™ family of safety microcontrollers based on lockstep architecture, making it the best choice for SIL2-3 (ASIL B-D) designs.

Safety and security are closely interrelated. Ensuring the security of the system is the only approach to create a safe robot. Firmware upgrades of controllers in the field are a good example. Authentication can prevent that non-original (counterfeit) software images can be downloaded to the system.

4 Conclusions and outlook

Robots are complex systems as shown in this document. Infineon offers a wide range of technologies in sensors, controllers, power switches, gate drivers and security solutions to help designers develop the next generation of robots.

Looking forward to the future, the ability of semiconductors to integrate more capabilities and more intelligence into processors will push the development of artificial intelligence (AI) and autonomous functions beyond what we have today. That can transform robots from intelligent units into an intelligent fleet in which many robots collaborate to carry out more complex tasks.

Developments in sensors like radar will lead robots to a higher level of understanding of their environment which will help them to behave in more integrated manner with its surroundings, acknowledge persons or objects and interact with them. Also higher precision and synchronized movements will be required in the future to enable robots to better fit into our world, carry out tasks more easily and really become our everyday helpers. For this more advanced motor controls with accurate positioning will be essential to ensure a higher level of interaction and synchronization between motors in the robot or different robot units. Only through the smoothness in movements will a robot be able to emulate or mimic human movements. This might be also a crucial factor in social acceptance of humanoid robots as service or educational robots in our homes, working places or schools.

Considering drives, the popularity of BLDC will increase as brushed motors will not be able to cope with precision and efficiency requirements once more advanced functions are demanded in robots. As of today, the higher performance they offer still comes hand-in-hand with higher overall cost. More integrated solutions, like microcontroller together with gate driver or gate driver integrated with MOSFETs, will simplify designs and reduce cost in the overall system. New wide bandgap devices will establish the foundation of higher switching frequency drives, helping both in the accuracy and footprint aspects of the drives.

The control algorithm development will be standardized and will be provided in many cases in hardware implementations. This will extremely reduce the development cycles, therefore reducing design costs and increasing the usage of BLDC drives.

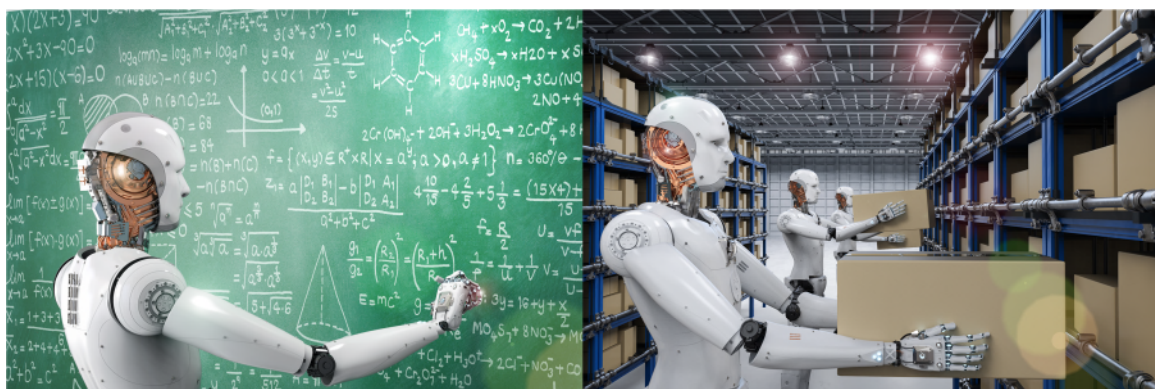


Figure 11 The future of robotics

www.infineon.com/service-robotics

Published by
Infineon Technologies AG
85579 Neubiberg, Germany

© 2018 Infineon Technologies AG.
All Rights Reserved.

Order Number: B111-I0649-V1-7600-EU-EC
Date: 05 / 2018

Please note!

THIS DOCUMENT IS FOR INFORMATION PURPOSES ONLY AND ANY INFORMATION GIVEN HEREIN SHALL IN NO EVENT BE REGARDED AS A WARRANTY, GUARANTEE OR DESCRIPTION OF ANY FUNCTIONALITY, CONDITIONS AND/OR QUALITY OF OUR PRODUCTS OR ANY SUITABILITY FOR A PARTICULAR PURPOSE. WITH REGARD TO THE TECHNICAL SPECIFICATIONS OF OUR PRODUCTS, WE KINDLY ASK YOU TO REFER TO THE RELEVANT PRODUCT DATA SHEETS PROVIDED BY US. OUR CUSTOMERS AND THEIR TECHNICAL DEPARTMENTS ARE REQUIRED TO EVALUATE THE SUITABILITY OF OUR PRODUCTS FOR THE INTENDED APPLICATION.

WE RESERVE THE RIGHT TO CHANGE THIS DOCUMENT AND/OR THE INFORMATION GIVEN HEREIN AT ANY TIME.

Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices please contact your nearest Infineon Technologies office (www.infineon.com).

Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life endangering applications, including but not limited to medical, nuclear, military, life critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.