Mini-Fit Sr.™ Power Products

	Mini-Fit Sr.™ Single Row	Mini-Fit Sr.™ Dual Row
Circuit Size	2 to 6	6,8,10,12 and 14
Available Configurations	W-to-W, W-to-B	W-to-W, W-to-B
Current (Max) Per Circuit	50.0A	43.0A
Wire Gauge	16 to 8 AWG	16 to 8 AWG
Features	Increased current carrying capacity	Increased current carrying capacity
Options	Reflow compatible	Reflow compatible

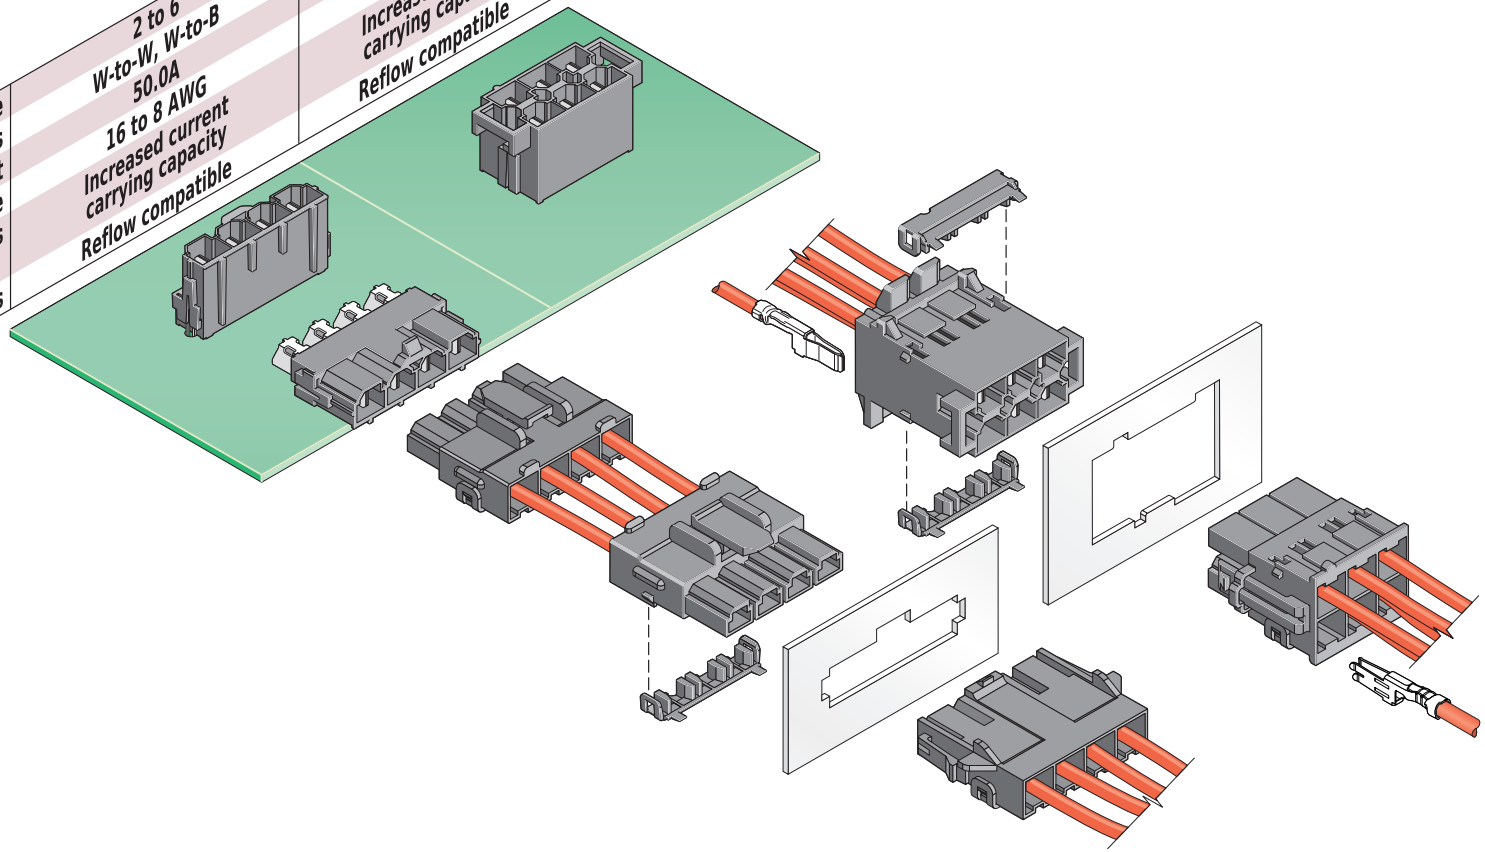

Mini-Fit Sr. Product Features

- Current up to 50.0A
- Operating Temp: -40 to +105°C
- 10mm Pitch
- UL / CSA / TUV Approved
- Fully Isolated Terminals
- Positive Locking
- TPA - Terminal Position Assurance
- Polarized and Keyed
- 600 Volts AC
- W-to-W (Wire-to-Wire)
- W-to-B (Wire-to-Board)

Options Include:

- Resin Options
  - V0
  - Reflow Compliant
- Terminal Options
  - Through Hole
  - Gold Plating

Mini-Fit Sr.™ Power Products
01G_101215
Order No. 987651-0314
© copyright 2015, Molex

molex®