

# Amphenol® RF

Global RF Solutions

## FEATURES & BENEFITS

Push-pull coupling with patented locking mechanism allows quick installation; will not disconnect during trouble shooting.

Push-pull offers safe coupling; locking mechanism will not vibrate loose as threaded connectors are prone to do.

Push-pull connectors can be more densely packed saving panel space in components that are shrinking in size.

## APPLICATIONS

Base Stations

Cable Assemblies

Components (Filters, Amplifiers, Combiners)

Datacom

Routers

Switching Equipment

Telecom



# 1.0/2.3 Connectors

## 1.0/2.3 Connectors

The compact European design of the 1.0/2.3 series permits dense connector packing; they are ideally suited to applications where space limitation is a factor. Versions are available with threaded coupling mechanisms which provide positive mating or a unique push-pull coupling system which allows quick installation. The Amphenol push-pull process is patented and ensures positive locking.

Amphenol 1.0/2.3 coaxial connectors operate from 0-10 GHz. This series complies with DIN 41626, DIN 47297, and NFC 93-571 international specifications.

### Specifications

#### Electrical

Impedance	50 $\Omega$
Frequency Range	0-10 GHz
Voltage Rating	250 volts peak
Contact Resistance	Center contact: 6 mili $\Omega$ : Outer contact: 3 mili $\Omega$
Insulation Resistance	10,000 megohms

#### Mechanical

Mating	Slide-on, push-pull, threaded
Braid/Jacket Cable Affixment	Hex crimp
Center Conductor Cable Affixment	Crimp or solder
Captivated Contacts	All crimps

#### Material


Male Contact	Brass center gold plated, Beryllium copper outer gold plated
Female Contact	Beryllium copper center
Insulator	Teflon
Crimp Ferrule	Copper alloy

#### Environmental

Temperature Range	-40° C to + 155° C
Connector Durability	500 matings

Plug

Jack

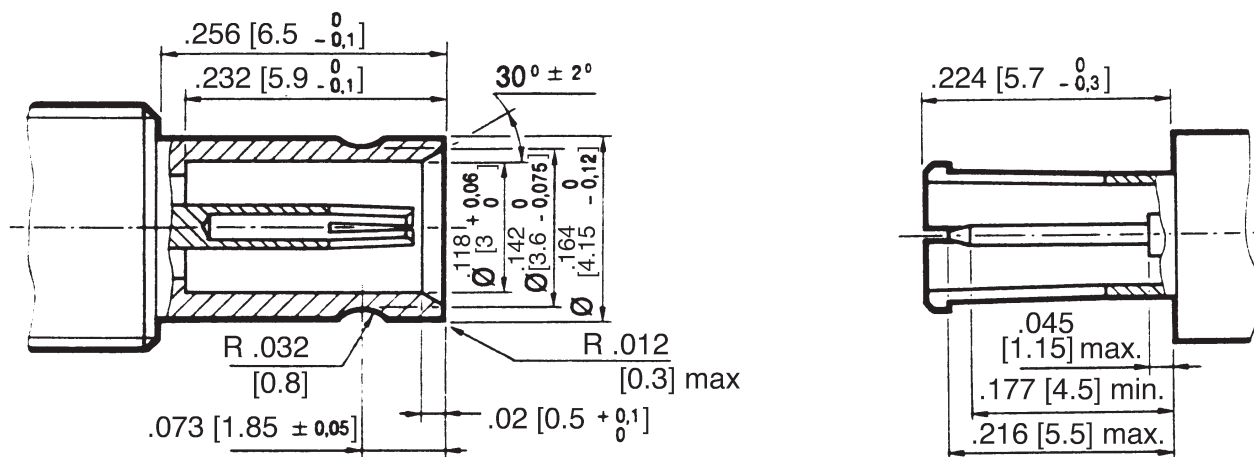

Rev. C