


High Performance MEMS Sensors



Accelerometers

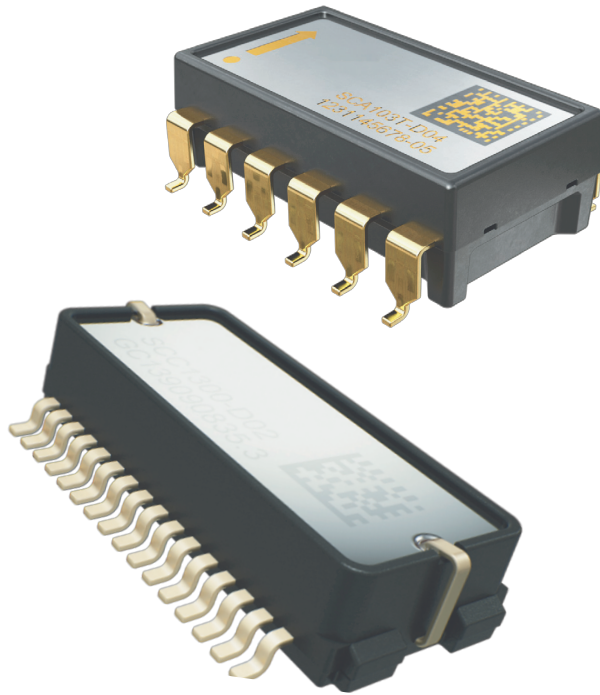

Murata is the global market leader in low-g acceleration sensors for automotive applications. The extensive accelerometer product range includes high performance analog and digital accelerometers for safety critical automotive and industrial applications.

Murata accelerometers are based on the company's proprietary 3D MEMS technology and offer a number of excellent product features for the most demanding applications. The sensing element and the measuring ASIC are assembled in a dual-in-line or dual flat lead plastic package with pins for the surface mount and re-flow soldering. They are environmentally protected with silicone gel, resulting in excellent performance and reliability in humid environments and in varying temperature. In addition, the robust sensing element design with over damped frequency response enables excellent performance even in harsh and vibrating environments.

One Axis Analog Accelerometer; Analog Output; Supply Voltage 5VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA610-E28H1A-*	X	±1.7g	-40...+125°C	1.20V/g	50Hz		Automotive safety critical applications, IMU, industrial applications
SCA610-E23H1A-*	X	±1.5g	-40...+125°C	1.33V/g	50Hz		
SCA610-ECKH1A-*	X	±2.65g	-40...+125°C	0.945V/g	115Hz		
SCA620-EF1V1B-*	Z	0...+2.0g	-40...+125°C	2.00V/g	50Hz		
SCA620-EF8H1A-*	X	±1.7g	-40...+125°C	1.20V/g	50Hz		
SCA620-EG4V1B-*	Z	-1...+3.0g	-40...+125°C	1.00V/g	115Hz		
SCA630-EDCV1B-*	Y	-12.3...+13.3g	-40...+125°C	0.15V/g	400Hz		

* Available Reel sizes: SCA610-E28H1A-1 (100 pcs reel), SCA610-E28H1A-6 (600 pcs reel)

Two Axis Analog Accelerometer; Analog Output; Supply Voltage 5VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA1000-D01-*	XY	±1.7g	-40...+125°C	1.20V/g	50Hz	Also 11 bit SPI output	Automotive safety critical applications, IMU, industrial applications
SCA1020-D02-*	YZ	±1.7g	-40...+125°C	1.20V/g	50Hz	Also 11 bit SPI output	
SCA1000-N1000070-*	XY	±4g	-40...+125°C	0.55V/g	115Hz	Also 11 bit SPI output	
SCA100T-D07-*	XY	±12g	-40...+125°C	0.17V/g	400Hz	Also 11 bit SPI output	

* Available Reel sizes: SCA1000-D01-1 (100 pcs reel), SCA1000-D01-6 (600 pcs reel)

One Axis Digital Accelerometer; Digital (SPI) Output; Supply Voltage 3.3VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA830-D05-*	Y	±2g	-40...+125°C	900LSB/g	50Hz		Automotive safety critical applications, IMU, industrial applications
SCA830-D06-*	Y	±2g	-40...+125°C	900LSB/g	50Hz	High Accuracy	
SCA820-D03-*	Z	±2g	-40...+125°C	900LSB/g	50Hz		
SCA820-D04-*	Z	±2g	-40...+125°C	900LSB/g	50Hz	High Accuracy	
SCA810-D01-*	X	±2g	-40...+125°C	900LSB/g	50Hz		

* Available Reel sizes: SCA830-D05-1 (100 pcs reel), SCA830-D05-10 (1000 pcs reel)

Two Axis Digital Accelerometer; Digital (SPI) Output; Supply Voltage 3.3VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA2120-D07-*	YZ	±2g	-40...+125°C	900LSB/g	45Hz		Automotive safety critical applications, IMU, industrial applications
SCA2110-D03-*	XZ	±2g	-40...+125°C	900LSB/g	45Hz		
SCA2100-D01-*	XY	±2g	-40...+125°C	900LSB/g	45Hz		

* Available Reel sizes: SCA2120-D07-1 (100 pcs reel), SCA2120-D07-10 (1000 pcs reel)

Three Axis Digital Accelerometer; Digital (SPI) Output; Supply Voltage 3.3VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA3100-D04-*	XYZ	±2g	-40...+125°C	900LSB/g	45Hz		Automotive safety critical applications, IMU, industrial applications
SCA3100-D07-*	XYZ	±6g	-40...+125°C	650LSB/g	45Hz		
SCA3060-D01-*	XYZ	±2g	-40...+105°C	1000LSB/g	9/35Hz	SPI output	Automotive non-safety critical applications, industrial applications

* Available Reel sizes: SCA3100-D04-1 (100 pcs reel), SCA3100-D04-B (1000 pcs reel)

For more information, please refer to the product datasheets available online at www.murataMEMS.fi

Inclinometers



Murata inclination sensors are an optimum choice for high accuracy leveling and inclination measurement instruments. The highest accuracy is available with the SCA103T series which uses a differential measurement principle to compensate for all common mode error and noise effects. The SCA103T output resolution is 0.0013°.

With the best shock durability available in the MEMS market, Murata inclinometers provide trouble-free measurements in moving machines, vehicles, airplanes, construction machines and handheld devices.

One Axis Inclinometer; Analog Output; Supply Voltage 5VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA61T-FAHH1G-*	X	±30°, ±0.5g	-40...+125°C	4.0V/g	18Hz	Also 11 bit SPI output	Leveling instruments, moving machines, rotating lasers, construction levels
SCA61T-FAHH1G-*	X	±90°, ±1.0g	-40...+125°C	2.0V/g	18Hz	Also 11 bit SPI output	
SCA103T-D04-*	X	±15°, ±0.26g	-40...+125°C	16.0V/g	18Hz	HIGH PRECISION	
SCA103T-D05-*	X	±30°, ±0.5g	-40...+125°C	8.0V/g	18Hz	HIGH PRECISION	

* Available Reel sizes: SCA61T-FAHH1G-**1** (100 pcs reel), SCA61T-FAHH1G-**6** (600 pcs reel)

Two Axis Inclinometer; Analog Output; Supply Voltage 5VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA100T-D01-*	XY	±30°, ±0.5g	-40...+125°C	4.0V/g	18Hz	Also 11 bit SPI output	Leveling instruments, moving machines, rotating lasers, construction levels
SCA100T-D02-*	XY	±90°, ±1.0g	-40...+125°C	2.0V/g	18Hz	Also 11 bit SPI output	


* Available Reel sizes: SCA100T-D01-**1** (100 pcs reel), SCA100T-D01-**6** (600 pcs reel)

One Axis Digital Inclinometer; Digital (SPI) Output; Supply voltage 3.3VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCA830-D07-*	Y	±90°, ±1.0g	-40...+125°C	32000LSB/g	6.25Hz		Automotive, moving machines

* Available Reel sizes: SCA830-D07-**1** (100 pcs reel), SCA83-D07-**10** (1000 pcs reel)

Gyroscopes and Combination MEMS



Murata develops and manufactures gyroscope components based on proven 3D MEMS technology and highly integrated electronics.

Industrial gyros offer a performance level that typically has been available only for expensive module products. The Allan Variance for the ±100°/s measuring range is less than 1°/h. The sensing elements and measuring circuitry are assembled into a pre-molded plastic dual-in-line (DIL) package, protected with silicone gel and covered with a stainless steel lid. All products are RoHS compatible and suitable for lead-free reflow soldering.

Angular Rate Sensor; Digital (SPI) Output; Supply Voltage 5VDC and 3.3VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCR1100-D02-*	X	±100°/s	-40...+125°C	50LSB /(°/s)	50Hz		Platform stabilization, motion analysis and control, guidance and navigation systems
SCR1100-D04-*	X	-40...+125°C	-40...+125°C	18LSB /(°/s)	50Hz		

* Available Reel sizes: SCR1100-D02-**05** (50 pcs reel), SCR1100-D02-**6** (600 pcs reel)

Angular Rate Sensor and 3-Axis Accelerometer Combo; Digital (SPI) Output; Supply Voltage 5VDC and 3.3VDC

Part Number	Axis	Range	Temp Range	Sensitivity	-3dB point	Note	Typical Applications
SCC1300-D02-*	X	±100°/s	-40...+125°C	50LSB /(°/s)	50Hz		Platform stabilization, motion analysis and control, guidance and navigation systems
	XYZ	±2.0g		1800LSB /g	45Hz		
SCC1300-D04-*	X	±300°/s	-40...+125°C	18LSB /(°/s)	50Hz		
		±6.0g		650LSB /g	45Hz		

* Available Reel sizes: SCC1300-D02-**05** (50 pcs reel), SCC1300-D02-**6** (600 pcs reel)

For more information, please refer to the product datasheets available online at www.muratamems.fi

Head Office

1-10-1, Higashi Kotari 1-chome
Nagaokakyo-shi, Kyoto
617-8555, Japan
Phone: 81-75-951-9111

International Division

3-29-12, Shibuya 3-chome,
Shibuya-ku, Tokyo
150-0002 Japan
Phone: 81-3-5469-6123

Murata Americas

Murata Electronics N.A., Inc. (Regional HQ)
2200 Lake Park Drive
Smyrna, GA 30080-7604, USA.
Phone: 1-770-436-1300
Fax: 1-770-436-3030

Murata Electronics (South America)

R.Leoncio de Carvalho,
234 10 andar 04003-010
Paraiso-Sao Paulo-SP Brazil
55-11-3371-6811

Murata Electronics (Mexico/Central America)

12 de Diciembre No. 1370 esq.con Guadalupe Piso
1 Int. "B" Fraccionamiento Chapalita.C.P. 45040
Zapopan, Jalisco, Mexico
011-52-33-3125-3425

Murata (China) Investment Co., Ltd.

Lane 318 Yonghe Road
Zhabei District, Shanghai 200072, China
Phone: 86-21-3205-4616
Fax: 86-21-3205-4617

Murata Europe

Murata Electronics Europe B.V. (Regional HQ)
Daalmeerstraat 4, 2131HC Hoofddorp
The Netherlands
Phone: +31-(0)23-5698360
Fax: +31-(0)23-5698361

Taiwan Murata Electronics Co., Ltd.

No 225 Chung - Chin Road, Taichung, Taiwan
Phone: 886-4-2425-4151

Murata Electronics Singapore (Pte.) Ltd.

200 Yishun Avenue 7
Singapore, 768927
Tel: 65-6758-4233
Fax: 65-6758-2026

Contact sales: www.murata.com/contact

For digital download of this brochure go to:

www.murataamericas.com/sensors

For more technical information on MEMS products go to: www.muratamems.fi

1. Export Control

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

2. Product specifications in this catalog are as of January 2013. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before your ordering. If there are any questions, please contact our sales representatives or product engineers.

3. This catalogue has only typical specifications because there is no space for detailed specifications. More detailed datasheets are available at www.muratamems.fi

4. This catalog is for reference only and not an official product specification document, therefore, please review and approve our official product specification before ordering this product.

5. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.

6. No ozone depleting substance (ODS) under the Montreal Protocol is used in our manufacturing process.

